



Wind Resource Data Summary Cotal Area, Guam Data Summary and Transmittal for January 2012

Prepared for:

GHD Inc.

194 Hernan Cortez Avenue
2nd Floor, Ste. 203
Hagatna, Guam 96910

February 2012

BACKGROUND

The Guam Power Authority (GPA) is performing an assessment of the wind resource potential on Guam with support from GHD Inc. and their subcontractor DNV Renewables (USA) Inc. (DNV). A preliminary site assessment was performed by DNV to evaluate potentially viable wind energy development areas on Guam and identify meteorological (met) tower locations. This report summarizes the monthly monitoring results and activities at the Cotal Area in central Guam.

GHD Inc. has subcontracted with DNV to collect, quality control (QC), validate, summarize, and transmit data for a 60-m meteorological tower located along the Cross Island Road in central Guam. This 60-m XHD tower, provided by NRG Systems, is identified as Site 0001. Black Construction Corporation installed the tower on July 29, 2011.


Location Summary

Site Number	Tower Type	Installation Date	Tower Coordinates (WGS 84)		Elevation
			Latitude	Longitude	
0001	NRG 60-m XHD	July 29, 2011	N 13°23.361'	E 144°43.359'	166 m (545 ft)

Sensor Summary

	Quantity	Nominal Sensor Height (m)	Actual Sensor Height (m)	Sensor Orientation (°)*	Boom Length (m)
NRG #40C Anem.	2	60	58	44, 134	2.4
NRG #40C Anem.	1	50	50	44	2.4
NRG #40C Anem.	2	40	40	44, 134	2.4
NRG #40C Anem.	1	25	25	44	2.4
NRG #200P Vanes	2	50, 45	52, 47.5	1, 1	2.4
NRG #110S Temp.	1	3	3		

* An orientation of 180° means the sensor is due south of the tower.

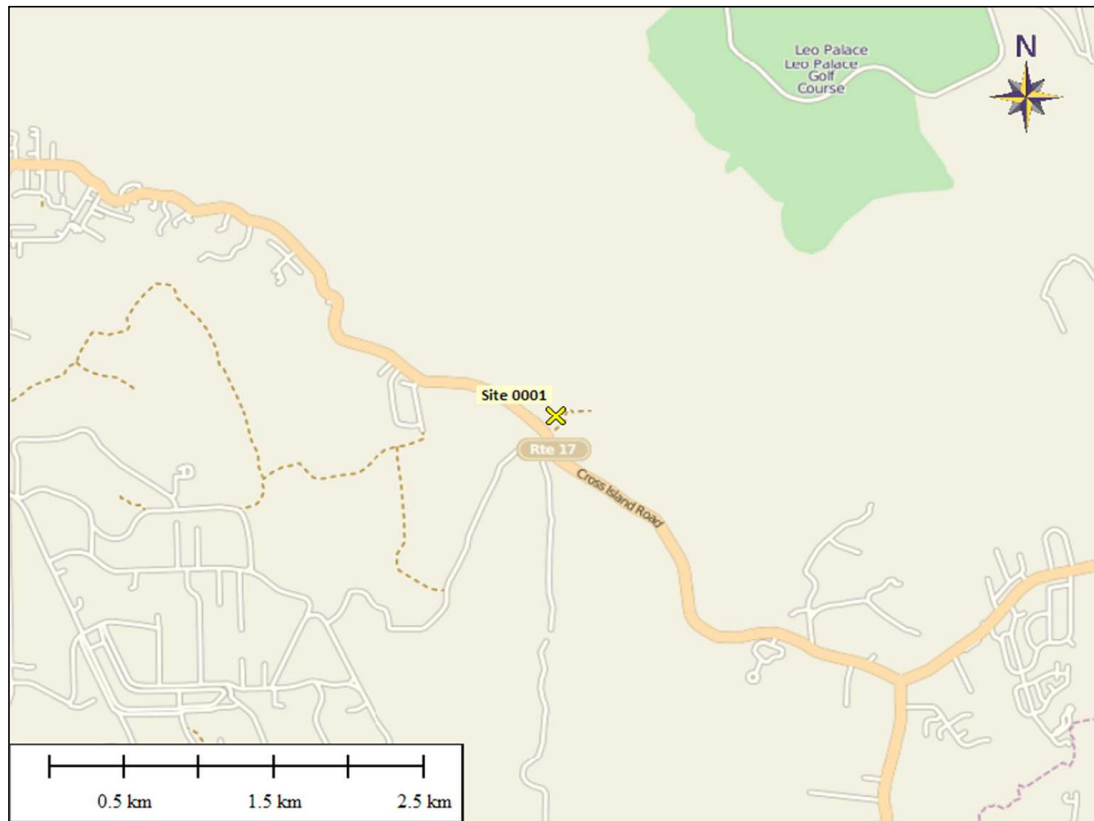

Location of GPA Wind Monitoring Station

OBJECTIVE AND DESCRIPTION

The monthly data summary is not a detailed analysis intended for use in making long-term energy estimates. The monthly activities provide a general validation and summarization of the 10-minute data, presented in a cumulative format. This includes elimination of data associated with tower shadow, icing, intermittent sensors, and failed sensors. The data summary does not include the detailed analysis of the data that is needed to address relatively small tower and boom effects, small sensor discrepancies, and other anomalies that may occur. While the validated data provided in the monthly processing provide a building block for evaluating a site's wind resource, they are not being delivered as a final wind resource assessment.

The information provided in this monthly data summary is based on the validated data but does not include detailed analysis and should be considered preliminary. For example, invalid data have not been replaced, and no consideration has been given to the long-term representativeness of the data that have been collected and reported in this summary. Additional analysis is required to establish a representative long-term data set.

Data Recovery

	Hours In Period	Hours Lost				Recovery Rate	
		60 m	50 m	40 m	25 m	All Heights	Upper Level
August 2011	744	125	259	125	259	74.2%	83.2%
September	720	0	181	0	181	87.4%	100.0%
October	744	0	13	0	13	99.1%	100.0%
November	720	0	0	0	0	100.0%	100.0%
December	744	0	0	0	0	100.0%	100.0%
January 2012	744	0	0	0	0	100.0%	100.0%
Overall	4,416	125	454	125	454	93.5%	97.2%

O&M Summary

	Site 0001 NRG 60-m XHD Installed 7/29/11
August 2011	Tower installed on 7/29. Incomplete data transmittals 8/1-8/12; transmittal issues resolved via remote patch file from DNV to the iPack 8/12.
September	No issues
October	No issues
November	No issues
December	No issues
January 2012	No issues

Green shading indicates greater than 70% data recovery at 60 m.

Cause of Hours Lost (60 m)

	Missing	Malfunction	Tower[1]
August 2011	125	0	0
September	0	0	0
October	0	0	0
November	0	0	0
December	0	0	0
January 2012	0	0	0
Overall	125	0	0

Cause of Hours Lost (50 m)

	Missing	Malfunction	Tower[1]
August 2011	125	0	0
September	0	0	181
October	0	0	13
November	0	0	0
December	0	0	0
January 2012	0	0	0
Overall	125	0	194

Cause of Hours Lost (40 m)

	Missing	Malfunction	Tower[1]
August 2011	125	0	0
September	0	0	0
October	0	0	0
November	0	0	0
December	0	0	0
January 2012	0	0	0
Overall	125	0	0

Cause of Hours Lost (25 m)


	Missing	Malfunction	Tower[1]
August 2011	125	0	0
September	0	0	181
October	0	0	13
November	0	0	0
December	0	0	0
January 2012	0	0	0
Overall	125	0	194

[1] Hours lost due to tower shadow are expected and occur under normal conditions where there is only one anemometer per measuring height.

Monthly Average Wind Speeds (m/s)

	60 m	50 m	40 m	25 m
August 2011	4.7	4.4	4.2	3.0
September	4.8	4.4	4.3	3.1
October	5.1	4.9	4.6	3.5
November	8.3	8.0	7.6	6.0
December	9.1	8.8	8.3	6.7
January 2012	7.5	7.2	6.9	5.2
Average [1]	6.6	6.3	6.0	4.6

[1] Average values are from August 1, 2011, through the current month.

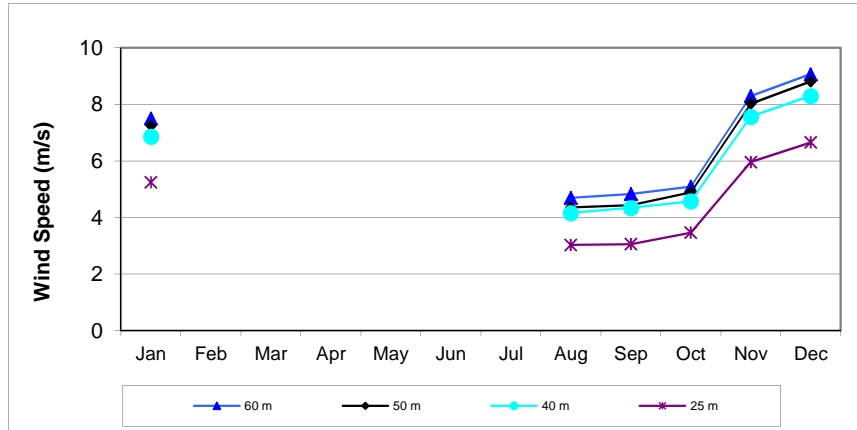

Monthly Wind Speeds

Maximum Wind Speed Gust (m/s)


	60 m	50 m	40 m	25 m
August 2011	25.6	26.0	24.1	22.5
September	18.7	18.3	18.7	16.0
October	19.5	19.5	18.0	15.7
November	22.5	22.9	23.3	19.9
December	21.4	21.8	22.2	21.4
January 2012	22.9	21.4	21.4	21.0
Period of Record [1]	25.6	26.0	24.1	22.5

[1] Period of Record is the maximum wind speed from August 1, 2011, through the current month.


Temperature Ranges (°C)

	Average	Minimum	Maximum
August 2011	26.6	22.6	32.9
September	26.5	22.7	32.6
October	26.3	21.8	33.0
November	26.7	22.8	31.9
December	26.7	22.5	31.7
January 2012	25.5	20.6	31.7
Period of Record [1]	26.4	20.6	33.0


[1] The Period of Record average temperatures are from August 1, 2011, through the current month.

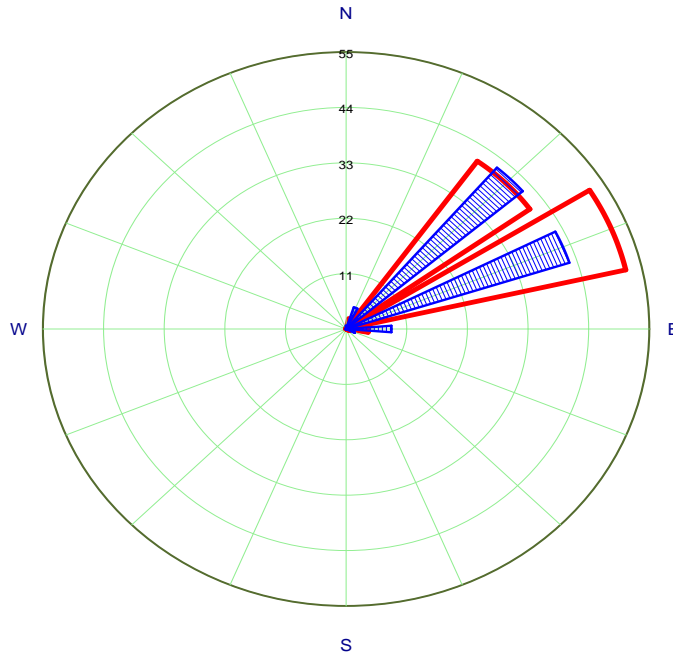

Monthly Wind Rose (60 m)

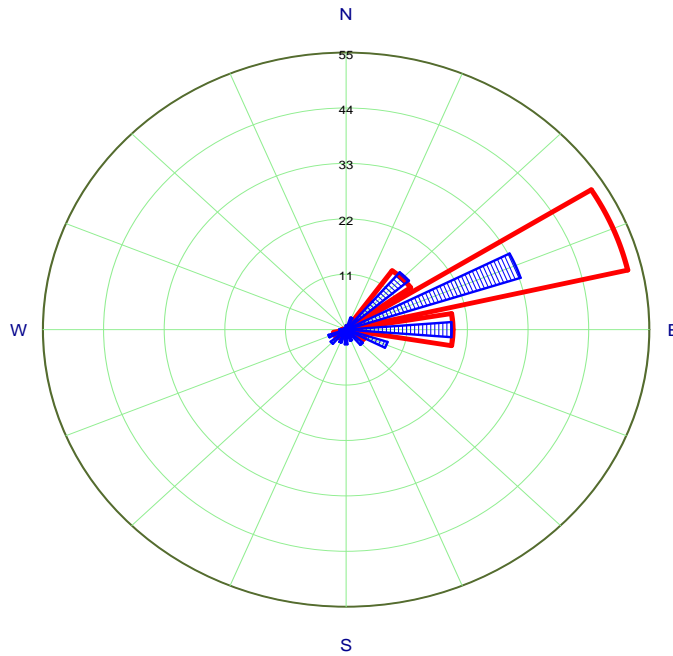

Cumulative Wind Rose (60 m)




Wind Shear Exponent

	40-60 m	25-50 m
August 2011	0.32	N/A
September	0.28	N/A
October	0.29	0.42
November	0.26	0.42
December	0.25	0.41
January 2012	0.25	0.43
Average [1]	0.27	0.42

[1] Average values are from August 1, 2011, through the current month.

N/A indicates less than 200 hours of wind speed recovery greater than 4 m/s for both anemometers used to calculate shear.

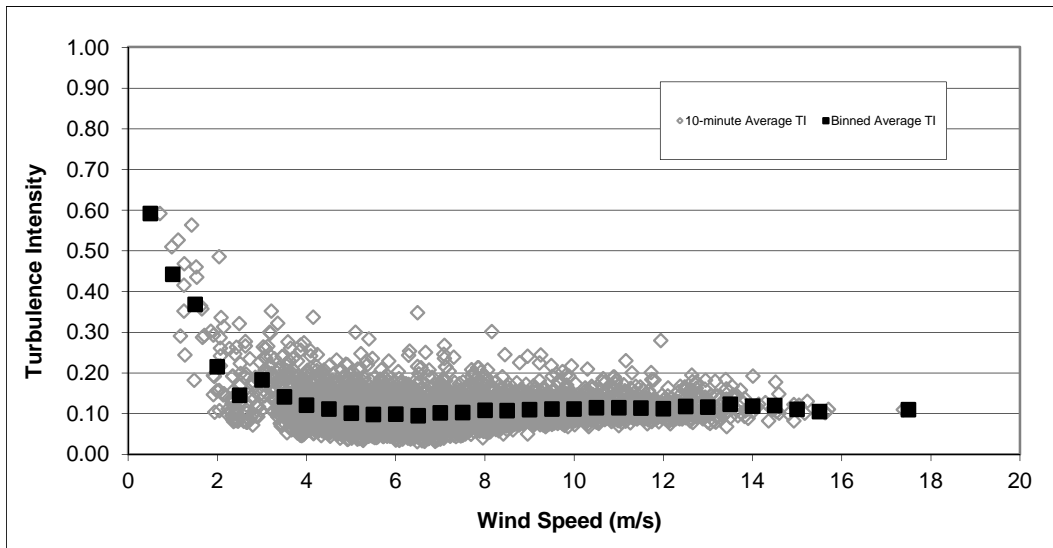

Average Turbulence Intensity by Wind Speed - Site 0001 (60 m)

PRELIMINARY DATA QUALITY CHECKING AND VALIDATION

Data are considered invalid if they do not appear to represent the actual wind conditions at the site. Typical causes of invalid data include tower wake influences, sensor icing, and equipment damage due to lightning, electrostatic discharge, failed components, or vandalism. The data validation process used to generate this report is generally automated and DNV is continuing to implement further automation. However, some manual review is required to assure the quality of the validated data. The data processing and validation are completed on 10-minute average data unless only hourly averages are available. The following provides a description of the data processing and validation activities completed prior to generating the data summaries.

Quality Checking

Data are quality checked on a weekly basis to verify normal operation of the logger and sensors. This process identifies failed sensors or other malfunctions that require immediate corrective action to maximize data recovery rates.

Validation

On a monthly basis, the 10-minute data are compiled into a monthly data set and data are validated to identify and remove data affected by tower wake influences, icing, intermittent operation, and other anomalies.

Tower Wake Influence - Wind speeds collected from an anemometer directly downwind of the tower are shadowed by the tower and consequently invalid. These invalid winds are removed from the data set. For example, an anemometer mounted to the south of the tower will record invalid wind speed data when the winds are from the north. The orientation of the anemometers is reported on the met tower commissioning sheets and can be verified by comparing two sensors on the tower that are oriented in different directions. For NRG tubular towers, the significant tower wake influence is approximately 50°. The exclusion sector may be wider for lattice towers which have a wider tower face than the tubular towers.

Intermittent Operation - When a sensor is operating intermittently, all data from the sensor are considered suspect and are removed from the validated data set. An anemometer that has failed will record the sensor offset. Vane failures are identified when the sensors on the same tower do not agree. These invalid values are all removed from the validated data set.

Other Issues - While the above process identifies the majority of invalid data, DNV also plots time series of wind speed, wind direction, and temperature for the month. This process provides another verification that all significant anomalies have been removed.

Most Representative Data Set

From the validated data, DNV generates a data set for each height at which data are available that are most representative of the wind speeds at that height. The factor considered in developing this data set is wind direction. When two sensors are installed at the same height, the valid wind speed data from the sensor that is least influenced by the tower is used. For example, where anemometers are oriented to the west and south, when the wind direction is between 45° and 225°, the winds from the south anemometer are selected, when the wind direction is between 225° and 360° or 0° to 45°, the winds from the west anemometer are selected. These criteria are applied to each 10-minute record. While all valid data are saved, this most representative data set is used to develop the data summary.

DATA SUMMARY

A data summary is generated from the most representative data set. The information included in the summary is described below.

Data Recovery, O&M Summary, and Reason for Hours Lost - The data recovery rates are provided for valid wind speed data collected at all heights. The “Hours Lost” column indicates the number of hourly data points that were missing or removed during the data validation process for each monitoring height. The “Recovery Rate” represents the remaining data expressed as a percentage of total sensor hours in the period. A summary of O&M events is provided as well as a table that indicates the reason for missing or invalid data.

Monthly Average Wind Speed and Maximum Wind Speed Gust - The average monthly wind speeds are summarized and include data for the entire period of record. When a period of record (POR) is longer than 12 months, the weighted average calculation weights the additional months of data to estimate an annual average. For example, if a POR begins November 1 and ends 14 months later at the end of December, the two Novembers would be averaged, and the two Decembers would be averaged, and these two averages would be included with the remaining ten monthly averages, resulting in a weighted annual average wind speed. A graphical illustration of the individual monthly wind speeds (weighted when there are more than 12 months of data) is also provided. The maximum 2-second wind speeds are summarized on a monthly basis.

Temperature Ranges - A summary of the monthly average, minimum, and maximum temperature data is provided for the period of record.

Monthly and Cumulative Wind Roses - Wind rose graphs are provided on a monthly and cumulative basis. The cumulative wind rose is based on all data collected to date, or the most recent 12 months if more than a year of data has been collected. The graphs consist of two bars in each of the 16 wind direction sectors that represent the percent of total time and the percent of total wind energy. The calculated wind energy in the wind rose is based on a cube of the wind speed. Total wind energy from a project will be somewhat different. The winds above rated wind speed of a wind turbine have a non-cubic relationship to the energy. However, the wind roses provide a clear indication of the direction of the energy-producing winds.

Wind Shear Exponent - Monthly wind shear exponent values are summarized for the period of record. The wind shear exponent represents the degree to which wind speed increases with height. The wind shear exponent is only calculated from sensors with the same orientation and when the wind speed is higher than 4 m/s (operable winds). Calculation of the wind shear exponent is based on the following equation:

$$\left(\frac{H_1}{H_2}\right)^\alpha = \left(\frac{V_1}{V_2}\right) \quad \text{where } H_1 \text{ and } H_2 \text{ are measurement heights, } V_1 \text{ and } V_2 \text{ are wind speeds, and } \alpha \text{ is the wind shear.}$$